

HDI Waterborne AsahiKasei WA21-100

Characteristics:


Can be used in water-based coatings


Directly dispersible in water

Use:

- Court track, floor paint
- Industrial
- Engineering machinery
- Waterborne wood
- Automobile paint

Film formation mechanism of aqueous two-component polyurethane cool coatings:

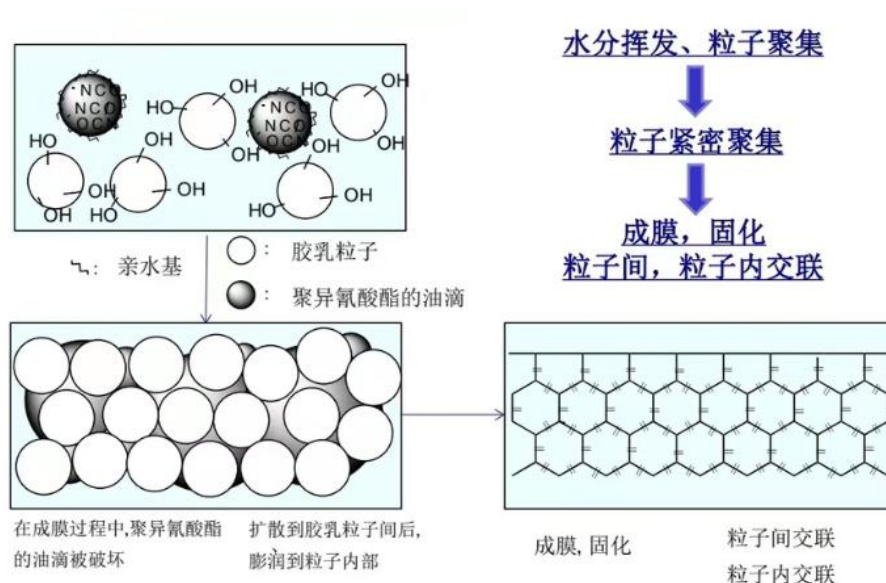

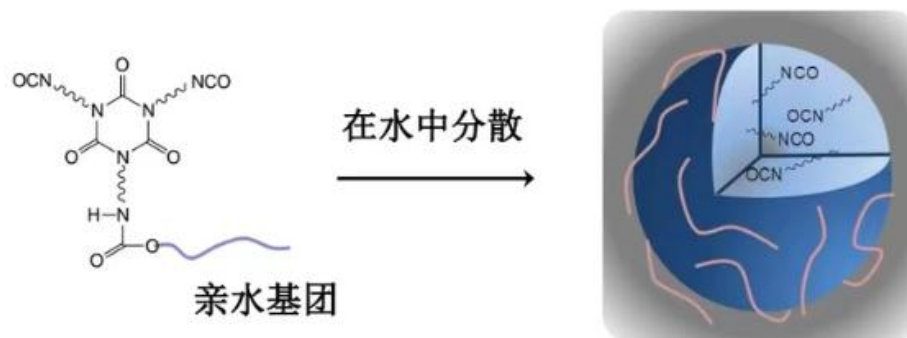

Storage and Transportation:

STORAGE: It is recommended to store in a dry and cool area with proper ventilation.

Packaging:

200KG/drum Please fasten the packaging cover as soon as possible after original packaging to prevent the mixing of other substances such as moisture and other substances that may affect the performance of the product. Do not inhale dust, avoid skin and mucous membrane contact. Smoking, eating and drinking are prohibited in the workplace. After work, shower and change clothes. Store contaminated clothes separately and reuse them after washing. Maintain good hygiene practices.

E_mail us : info@allhdi.com

